

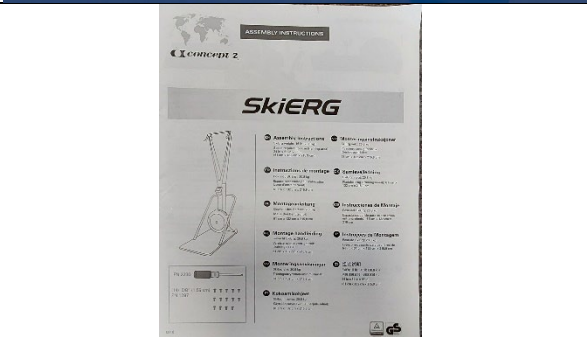


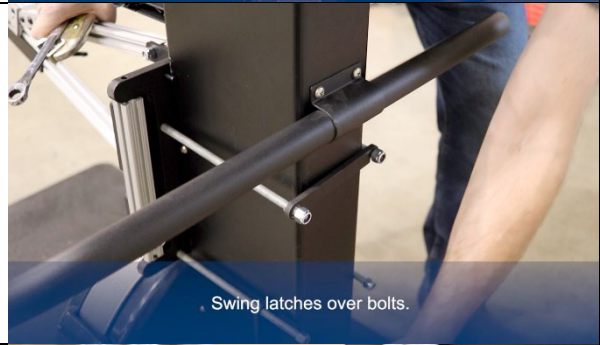






aSKI Assembly Instructions

Refer to video for more details: <https://youtu.be/a7bDZM6JvJU>

<p>1. Identify the pieces for the aSKI The adapter</p> <p>The base</p>	
<p>2. Assemble tools:</p> <ul style="list-style-type: none">• Vice grips• 9/16 wrench	 <p>Tools required: Vice grips 9/16 Wrench</p>
<p>3. Assemble Concept 2 ski erg and base according to instructions (if required).</p>	

<p>4.</p>	<p>Attach bolts and 2 swing latches to adapter as shown in photo (if necessary)</p>	
<p>5.</p>	<p>Place adapter on ski post, aligning pins on back of adapter on either side of the post. The adapter should be positioned so it swings to the right (telescoping function is on the bottom)</p>	 <p>Place adapter on Ski Erg post.</p>
<p>6.</p>	<p>Swing latches over adapter bolts, now protruding on back side of erg.</p>	 <p>Swing latches over bolts.</p>
<p>7.</p>	<p>Make sure adapter is not resting on the drum. Lift it up a bit (you can shim with a piece of foam during installation).</p>	 <p>Make sure adapter is not resting on the drum. Lift it up a bit.</p>
<p>8.</p>	<p>Attach vice grips to bolt to prevent rotation. Tighten bolt using 9/16 wrench, just until they make contact on each side.</p>	 <p>Attach vice grip to bolt to prevent roation.</p>

9.	Now tighten all four bolts in turn.	 <p data-bbox="787 451 1377 527">Tighten all four bolts. Not too tight. Just so they make contact on each side.</p>
10	If necessary, go back and snug up bolts.	 <p data-bbox="787 787 1377 869">If necessary snug things up.</p>
11	You are now ready to ski!	