BCIT CARPET STANDARDS

Version 1.2. Revised by Campus Planning – October 18, 2022

TABLE OF CONTENTS

- **General Carpet Application Directions** ---------- p.2
- **Interface – Aerial Planks**---------- p.3
- **Milliken – Color Field** ---------- p.4

General Carpet Application Directions

New buildings and large-scale refresh projects have their own colour and flooring pallets, prepared by an external architect team. Please refer to the **BCIT Technical Standards – Carpet** for more information.

For internal carpet renewal projects, the **Interface - Aerial 104672 GREIGE – 100% Random Field Coverage** should be used. Spaces include conference rooms, reception-lobby areas, public common areas, shared open office areas, and any SSEM remediation carpet work.

If the carpet project is to fix a small area, then the colour of the existing carpet should be matched if there is a current supply in the warehouse. If no existing carpet can be used as a matching patch, then the whole area should be re-floored in Interface - Aerial 104672 GREIGE – 100% Random Field Coverage. Small-scale carpet projects for individual office spaces will be assessed on a case-by-case basis.

The application of any carpet that is not documented in the BCIT Carpet Standards will need approval by Campus Planning. For any other flooring, consultation with Campus Planning is required.

Interface - Aerial Planks - 104672 GREIGE – 100% Random Field Coverage

- **Manufacturer:** Interface
- **Collection:** Aerial
- **Colour:** 104672 GREIGE – 100% Random Field Coverage
- **Installation Pattern:** Variable drop Ashlar
- **Installation Method**: TacTile Installation (Glue-free) is preferred. Glue down installation is an alternative method.
- **Sample:**

- **Specification:**

Modular, 25 cm x 1 m	138830AK00
Backing System	GlasBac® Tile
Yarn Manufacturer	Aquafil
Yarn System	100% Recycled Content Type 6 Nylon
Color System	100% Solution Dyed
Construction	Tufted Textured Loop
Preservative Protection	Intersept®
Soil/Stain Protection	Protekt2®
Pile Thickness	0.097 in., 2.5 mm
Pile Density	5,567
Total Recycled Content	70%
Indoor Air Quality	CRI Green Label Plus #GLP0820

- **Application:** Primary carpet replacement for all campus spaces that require carpet.

- **Manufactures Collection Link**: https://interfaceinc.scene7.com/is/content/InterfaceInc/ec_am-aerialplanksviewbook2018pdf

2. Milliken - Color Field - 126-5 Dry Dock

- **Manufacturer:** Milliken
- **Collection:** Color Field
- **Colour:** 126-5 Dry Dock
- **Installation Pattern:** Variable drop Ashlar
- **Installation Method:** TacTile Installation (Glue-free) is preferred. Glue down installation is an alternative method.
- **Sample:**

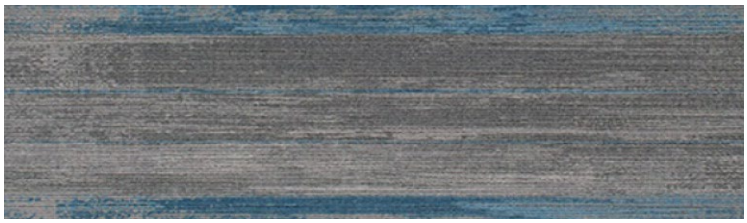

- **Specification:**

Construction
Tufted, Textured Loop

Tile Size
25 cm x 1 m (9.84" x 39.4")

Yarn Type
Milliken-Certified WearOn®Nylon

Stain Resist / Soil Release
StainSmart®

Standard Backing
PVC-Free WellBAC® Cushion
Available with TractionBack®

Texture Appearance Retention Rating (TARR)
Severe Traffic End-Use Applications

Recommended Installation Method

PLANKS

- **Application:** Small-scale carpet projects will be assessed on a case-by-case basis. Individual office spaces could consider using the Milliken Color Field 126-5 Dry Dock carpet **only** if there are adjacent offices currently using the same carpet.

- **Manufactures Collection Link**: https://fccatalogblob.milliken.com/fccatalogblob/documents/60/C1/Color%20Field%20Brochure.pdf?v=2022.07.08.10.48.55